QwikPad®

FOR CONDENSERS

QT8036 | QT8040



KEY QUALITIES

ULTRA-DURABLE

UV-resistant, high-durability construction. Includes **304 Stainless Steel, 13 Gauge Tie-Down Assemblies** to secure the outdoor unit to the Qwik**Pad**®.

LIGHT-WEIGHT

Our 36" x 36" pad weighs only **29 lbs** for transport, but 163 lbs once filled.

The 40" x 40" pad weighs just **35 lbs** for transport, but 203 lbs filled.

HURRICANE-RATED


Rated for **winds up to 180 mph** and **exceeds Miami-Dade** 175 mph wind requirements.

UNIQUE GELLING AGENT

Once water is added, a super absorbent material forms a **solidus gel**, making the pad weigh about **5X** its initial weight to meet building code requirements.




Stainless Steel Tie-Down Assemblies

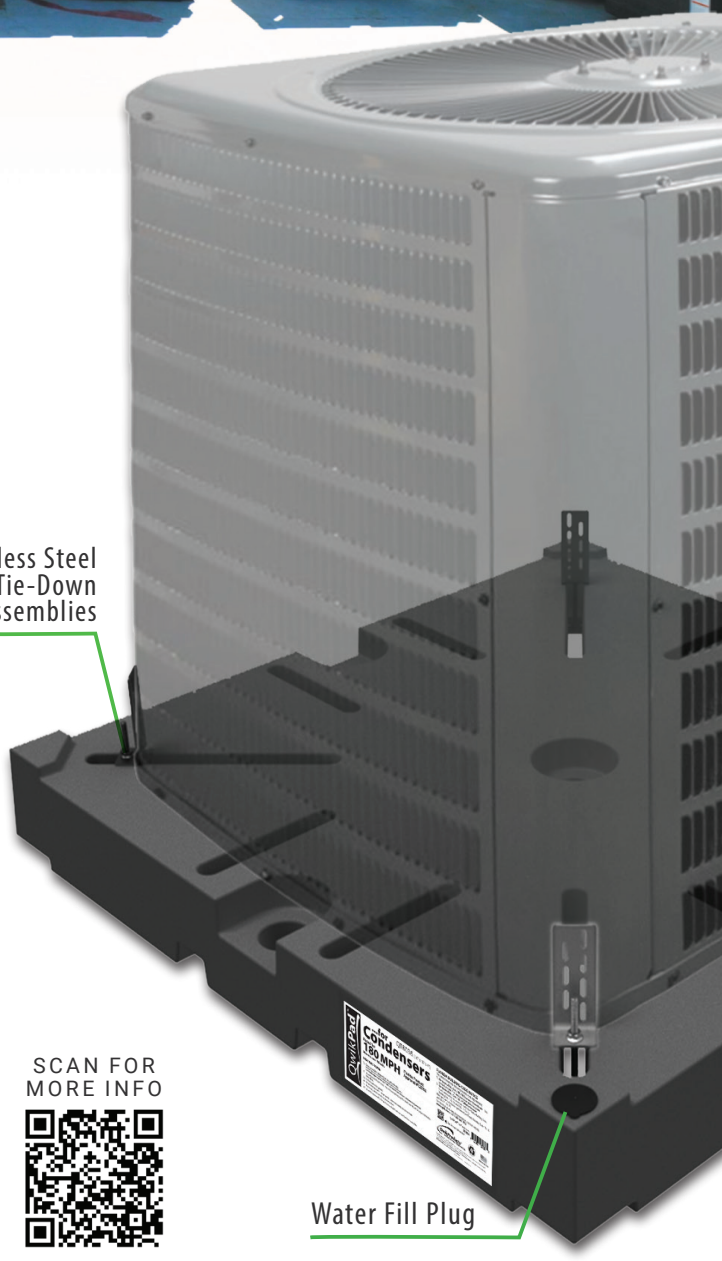

Water Fill Plug

FINALLY, A LIGHTWEIGHT, EASY-TO-INSTALL CONDENSER PAD THAT MEETS WIND LOADING REQUIREMENTS

INCLUDED HARDWARE:



Qwik**Pad**® "L" Bracket (4)



Carriage Bolt Holder (4)




¼"-20 x 4" Carriage Bolt (4)



#10-16 x ¾" Self-Drilling, Hex Head Screw (8)



¼"-20 Serrated Flange Nut (4)



Builds (4) Stainless Steel Tie-Down Assemblies

SCAN FOR MORE INFO

QwikProducts® by Mainstream Engineering

CONTACT US
1-800-866-3550
info@qwik.com

VISIT OUR WEBSITES
www.qwik.com
www.epatest.com

LOCATION
Mainstream Engineering Corporation
200 Yellow Place Rockledge, FL 32955

MADE IN THE USA
MKTG000243_REV-L / 100010860

QwikProducts® by Mainstream Engineering

QWIKPAD® FOR CONDENSERS

Rated for 180 mph Hurricane Winds

The Florida building code rated air conditioning support pad is lightweight when purchased, but weighs enough to meet code requirements up to 180 mph wind loading when filled with water and secured with stainless steel tie-down assemblies (supplied). Each pad includes a unique gelling agent that, once water is added, forms a solidus gel. Optional ground and concrete anchors provide additional hurricane protection when needed.

FLORIDA BUILDING CODE NOTICE

This product meets the following building code requirements:

1. **Mechanical Vol., Sect. 304.10 Clearances from Grade** – This product provides 4" of clearance above adjoining grade.
2. **Mechanical Vol., Sect. 301.15 Wind resistance** – Load combinations in accordance with the Florida Building Code, Building Vol. – Ch. 16 and ASCE 7 – Ch. 2.

Wind pressure calculations performed per Florida Building Code, Building Vol. - Ch. 16 and ASCE 7 - Ch. 29. For the most up-to-date documentation, visit our website, **www.qwik.com/qwikpad-for-condensers-product-details/** or call **1-800-866-3550**.

TO INSTALL THE UNIT:

1. Choose acceptable equipment pad size and anchoring method that meets wind loading requirements in your area. Use the load tables included with the Qwik**Pad®** for **Condensers** or go to **www.qwik.com/qwikpad-for-condensers-product-details/** to use our automated calculation software.
2. Tip pad towards fill port corner. This will cause gelling agent to collect near fill port for proper distribution when filling.
3. Level the pad on the ground.
4. Fill pad completely with tap water. Water will solidify into gel over time.
5. Install concrete or ground anchors, when required.
6. Secure the equipment to the pad using tie-down assembly hardware.

SPECIFICATIONS	QT8036	QT8040
DIMENSIONS	36" x 36" x 4"	40" x 40" x 4"
MATERIAL	Linear Low Density Polyethylene (LLDPE)	Linear Low Density Polyethylene (LLDPE)
PAD WEIGHT (EMPTY)	29 lb	35 lb
PAD WEIGHT (FULL)	163 lb	203 lb
MAXIMUM CONDENSING UNIT SIZE	32" x 32"	36" x 36"
MINIMUM CONDENSING UNIT SIZE*	22" x 22" (Listed on Engineering Documents) 20.5" x 20.5"	24" x 24" (Listed on Engineering Documents) 17.5" x 21.5"

**An independent Engineering Report is recommended to verify proper installation, as mounting requirements may vary when accommodating mini-splits.*


OPTIONAL ACCESSORIES

Anchors may be required to meet high wind loading, depending on the unit size and weight. Use the load tables included with the Qwik**Pad®** for **Condensers** or go to our website to use our automated calculation software to determine if anchors are necessary for your installation.

GROUND ANCHOR KIT (PKG OF 2)	QT8110



CONCRETE ANCHOR KIT (PKG OF 4)	QT8111

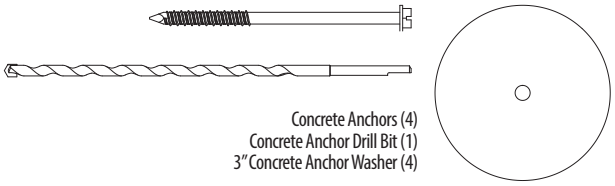

Concrete Anchors (4)
Concrete Anchor Drill Bit (1)
3" Concrete Anchor Washer (4)

Qwik**Products®** and Qwik**Pad®** are registered trademarks of Mainstream Engineering Corporation
Rockledge, Florida 32955, (321) 631-3550 © 2025 Mainstream Engineering Corporation
Protected by U.S. Patent #10,408,493, #10,559,742, #11,322,678, and #11,362,262